





10KW永磁发电机性能测试报告

项 目	设计指标						
转速 (rpm) 性能指标	100	0	18	36	59	72	90
一、空载试验							
1、空载交流电压(V)	≥AC400	0	112	245	403	493	620
二、负载试验							
1、电 压 (V)	AC400	0	98.2	192.8	292.3	346.9	400
2、电 流 (A)	14.43	0	4.23	8.04	11.81	12.97	14.97
3、输出功率 (W)	10000	0	719.45	2684.79	5978.97	7792.78	10371.22

空载转速电压曲线

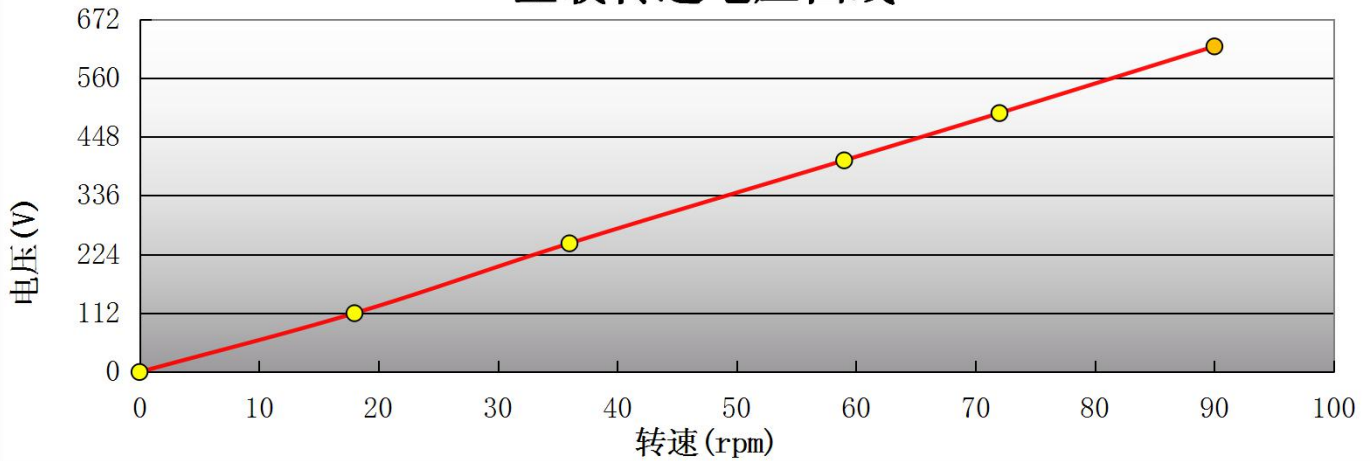


负载转速功率曲线图

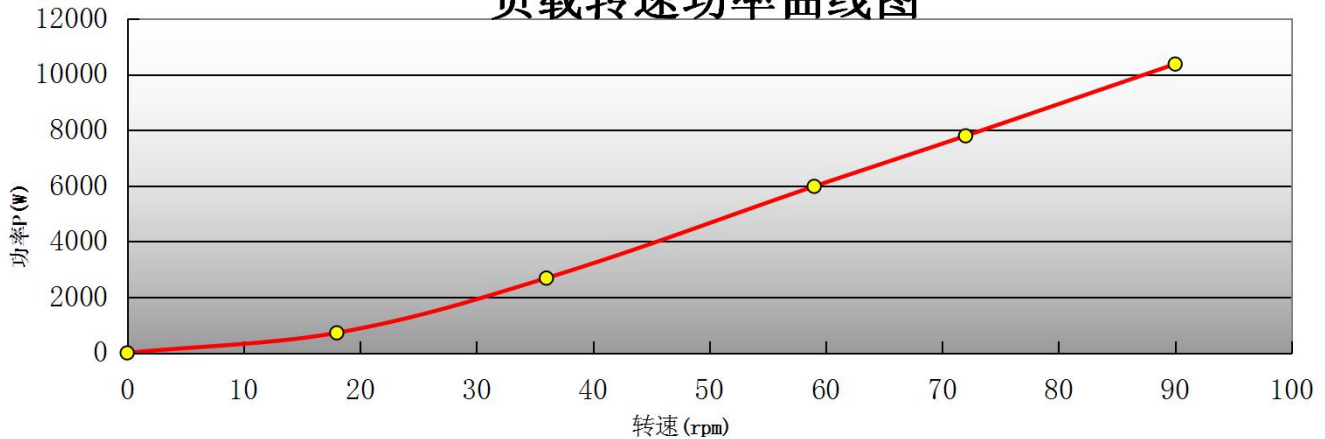


6.5KW测试报告

序号	转速 (rpm)	启动力矩 (N*M)
1	0	7.47
2	9	7.43
3	18	7.72
4	27	8.01
5	36	7.83
6	45	7.16
7	54	7.63
8	63	7.84
9	72	7.23
10	81	7.27
11	90	7.83
12	99	7.72
13	108	7.81
14	117	7.65
15	126	7.76
16	135	7.47
17	144	7.99
18	153	8.37
19	162	7.44
20	171	8.23
21	180	7.51

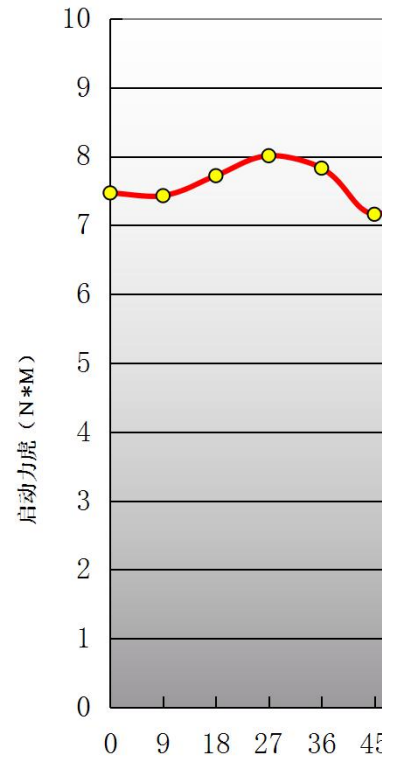


22	189	8.03
23	198	7.84
24	207	7.61
25	216	7.84
26	225	7.45
27	234	7.41
28	243	7.97
29	252	8.08
30	261	7.65
31	270	8.64
32	279	7.85
33	288	7.17
34	297	7.69
35	306	7.67
36	315	7.3
37	324	7.56
38	333	7.17
39	342	7.48
40	351	8.16
41	360	8.03
42	369	7.38
43	378	8.19

44	387	7.44
----	-----	------

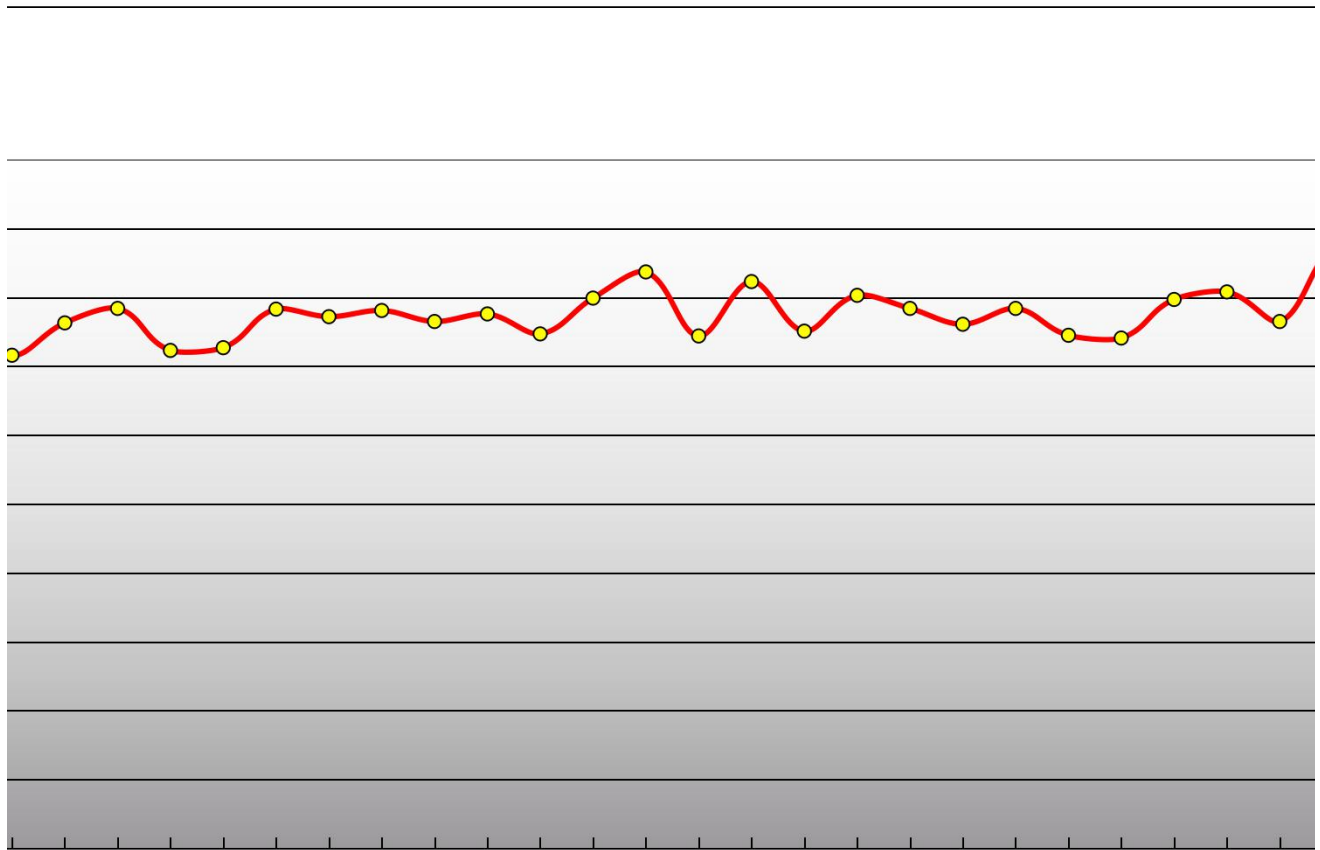

15 54 63 72 81 90 99 108 117 126 135 144 153 162 171 180 189 198 207 216 225 234 243 252 261 :

转速 (rpm)

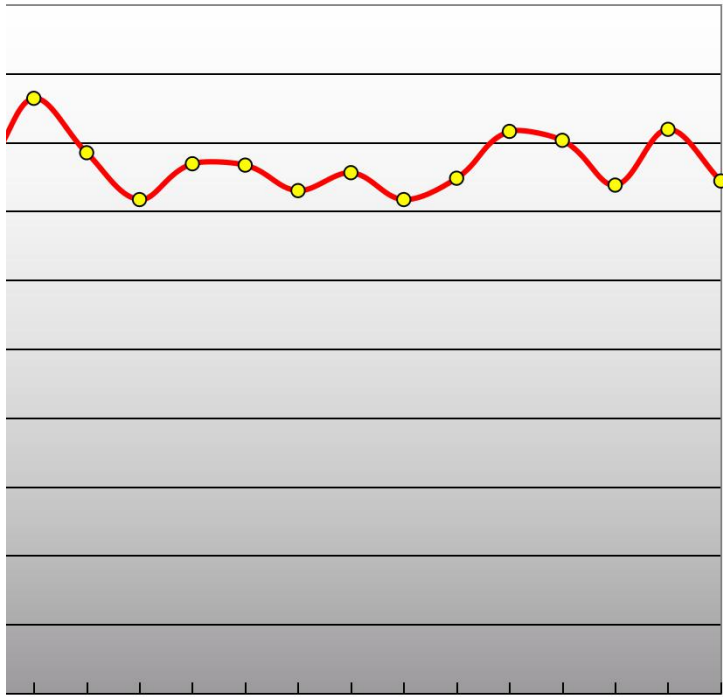

270 279 288 297 306 315 324 333 342 351 360 369 378 387

